


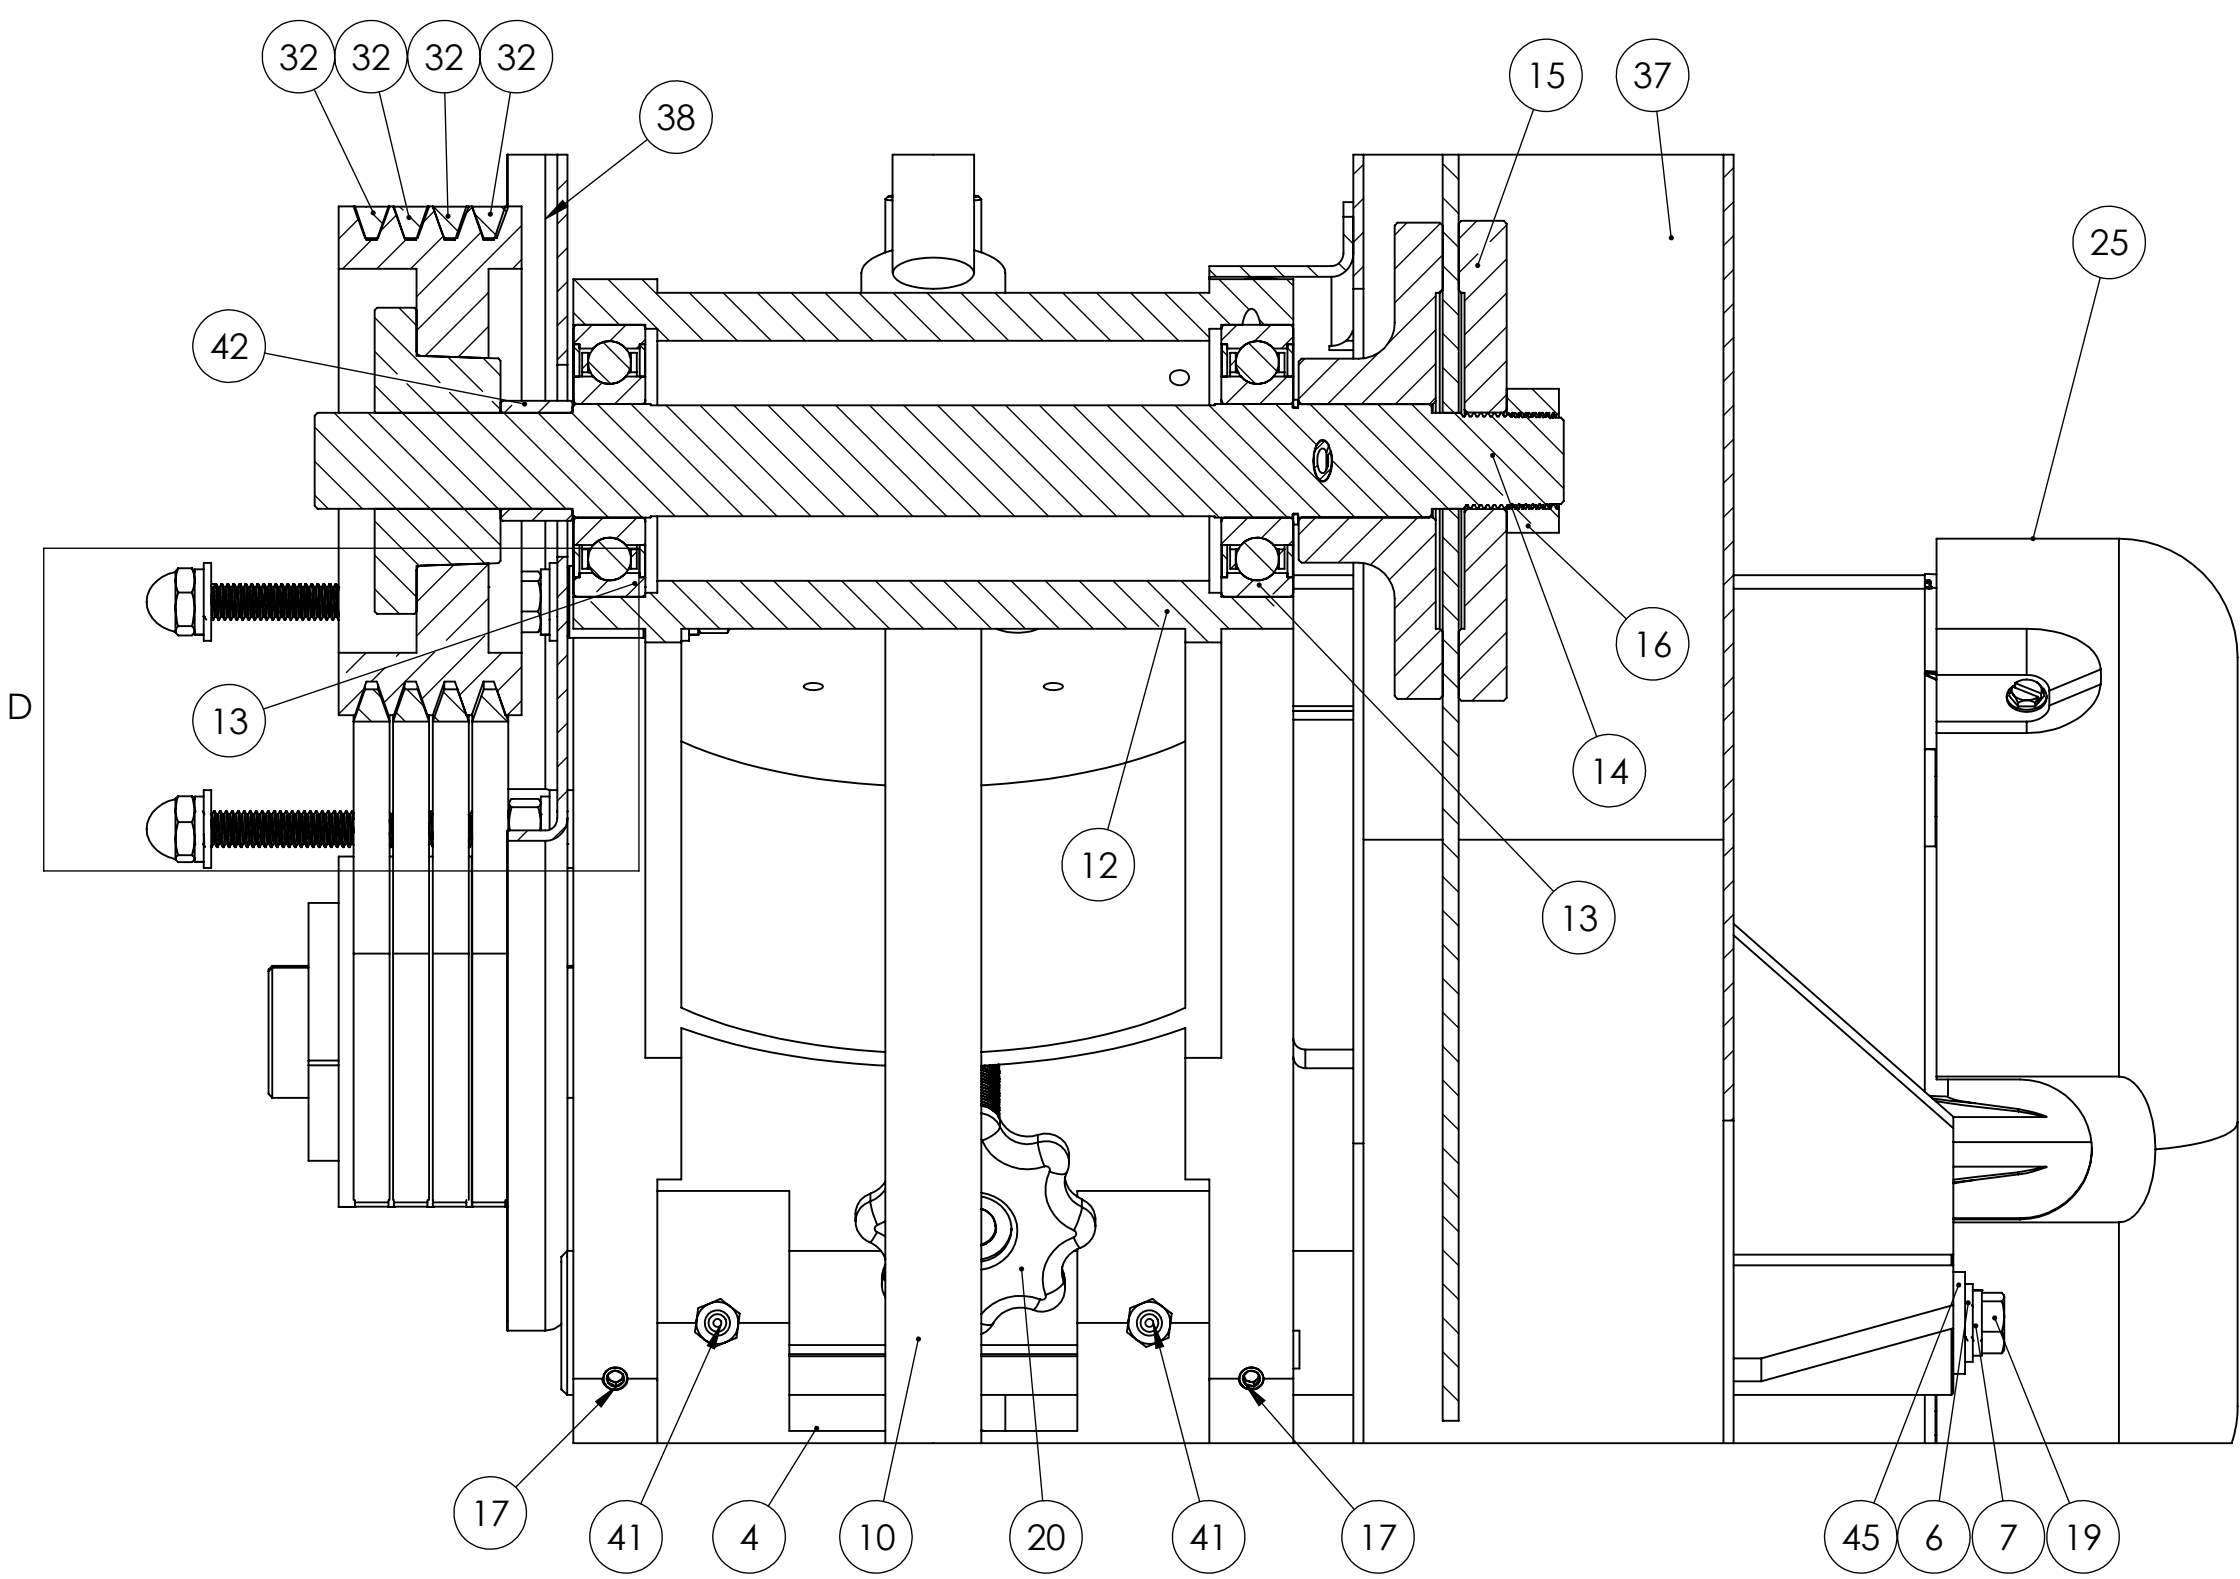


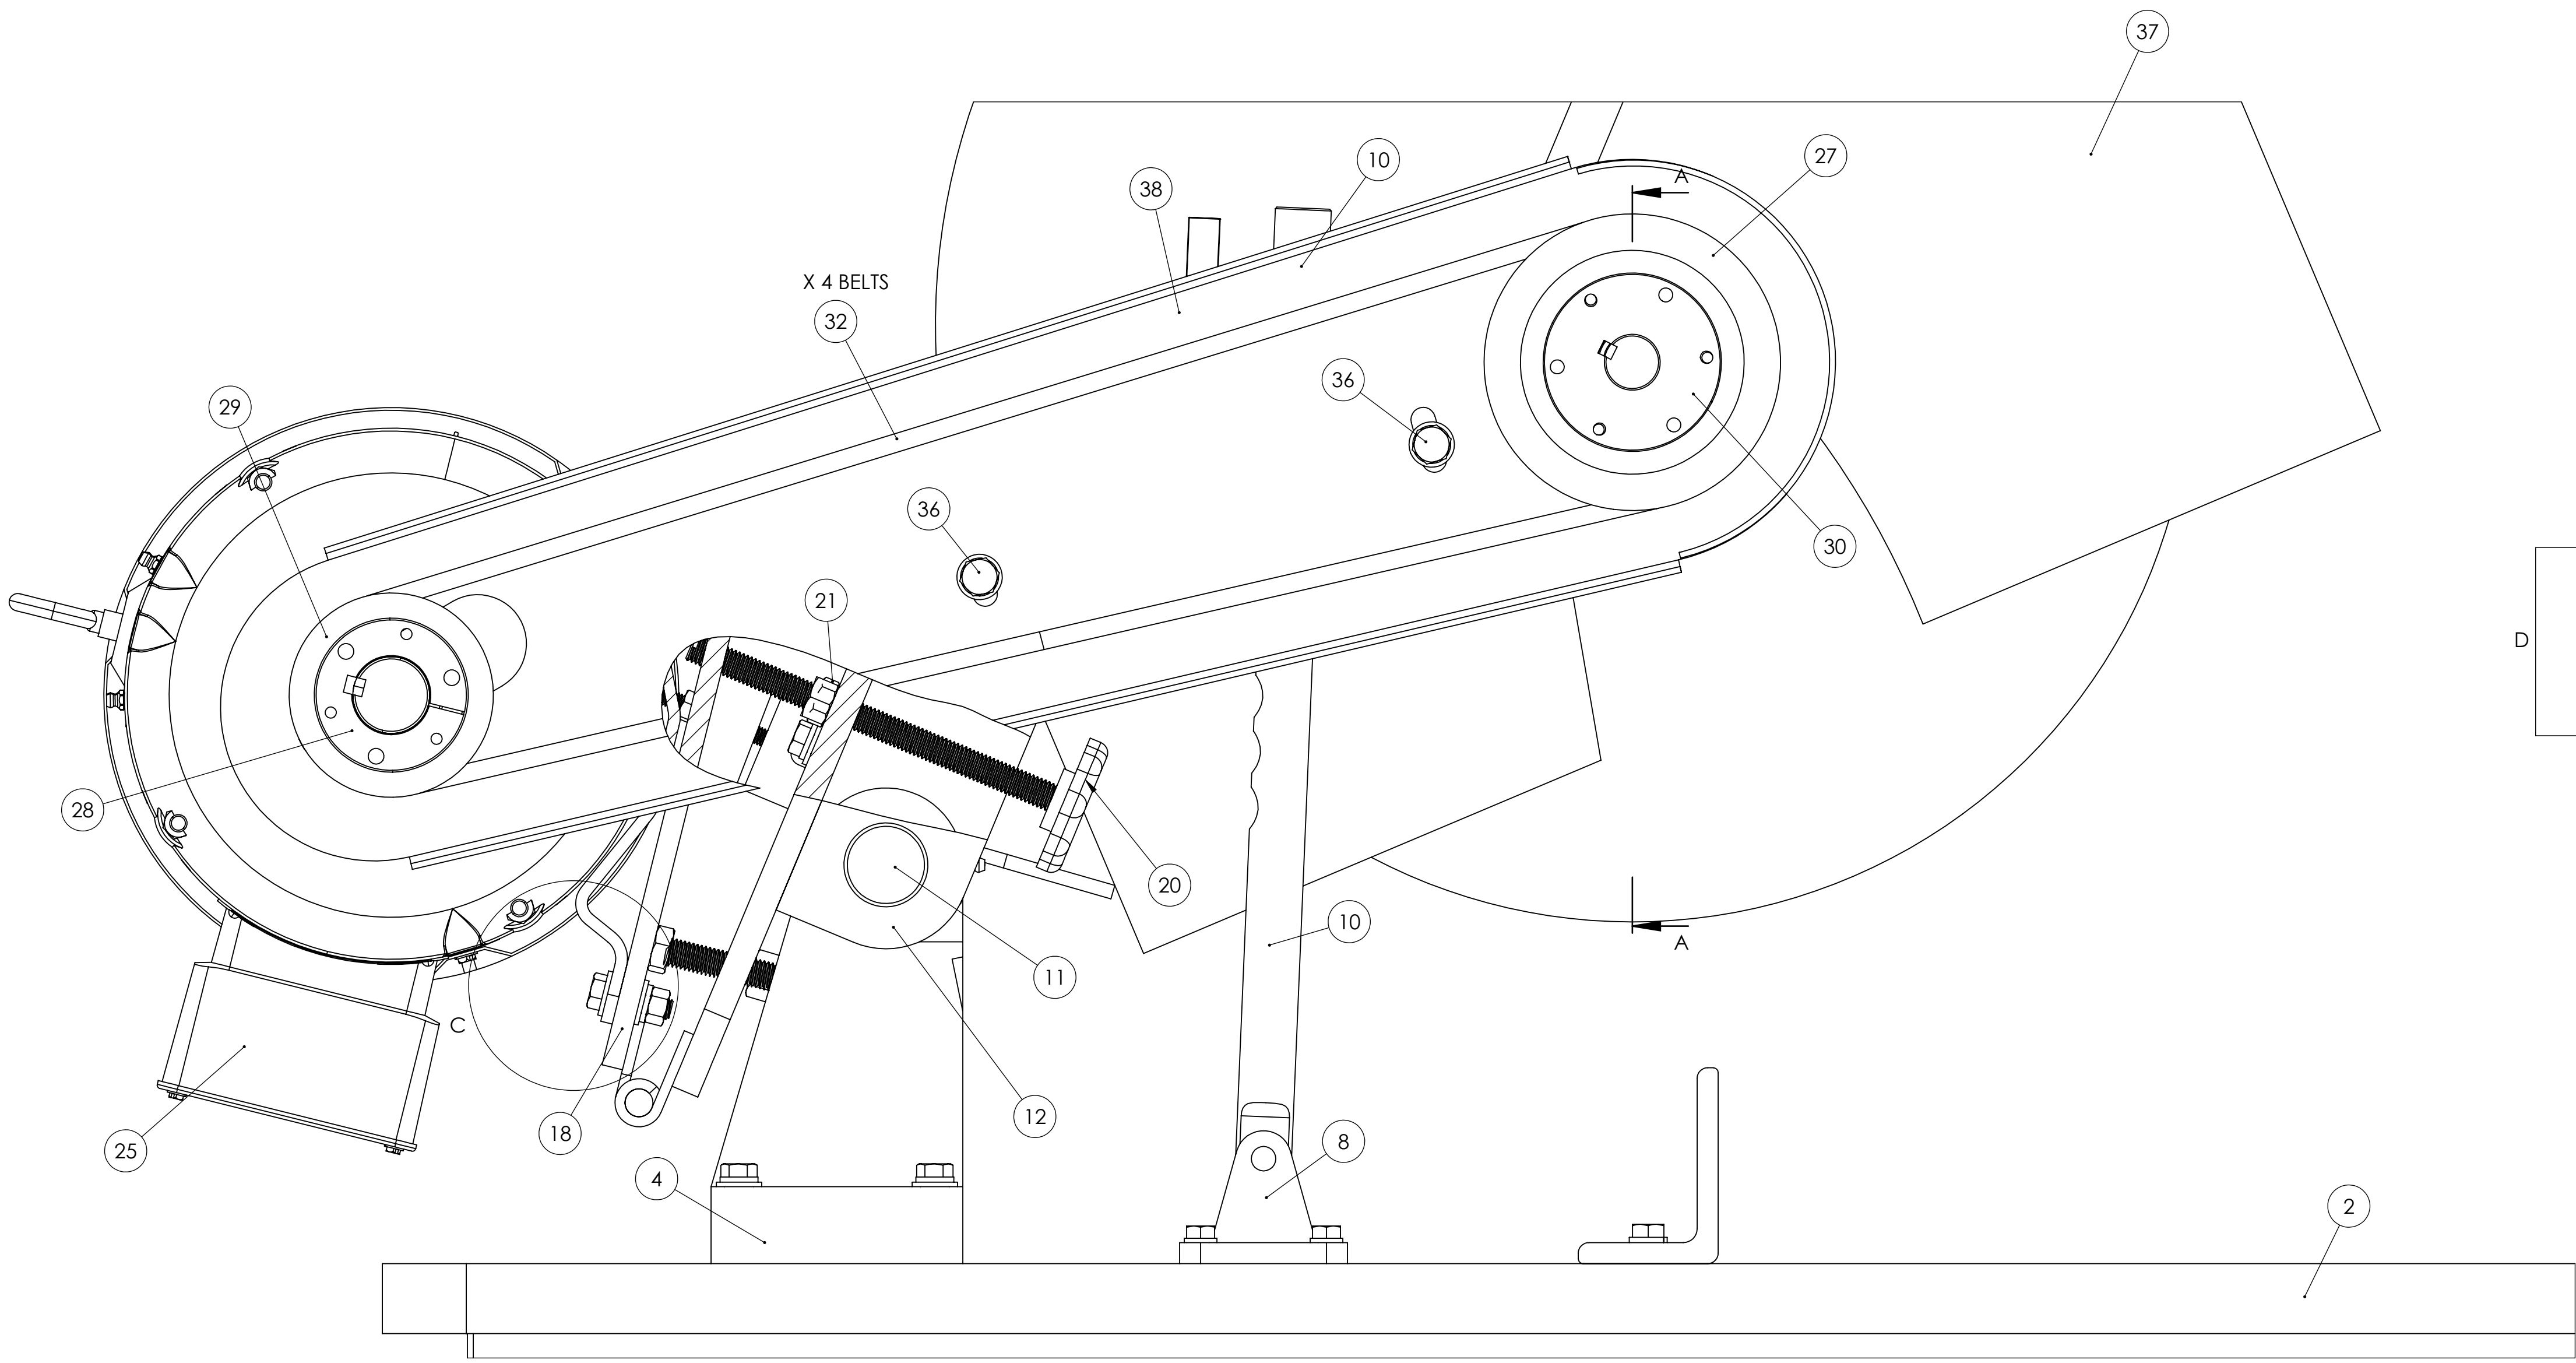


SECTION A-A
INTERNAL SPINDLE/ FRONT
OF TRUNNION
SCALE 1 : 2

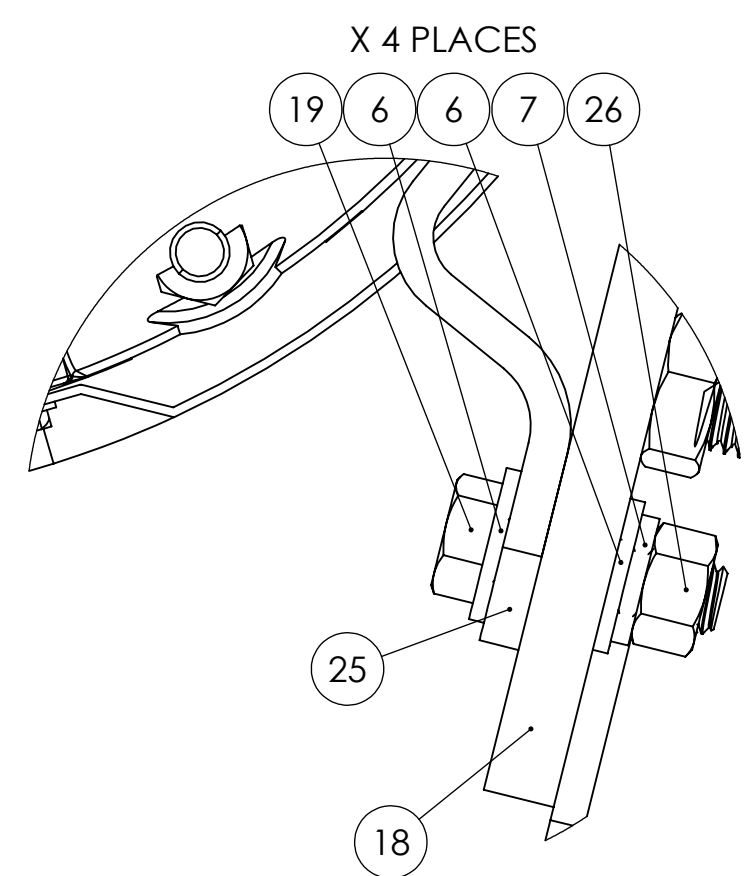



DETAIL C
SCALE 1 : 1
MOTOR ATTACHMENT
DETAILS

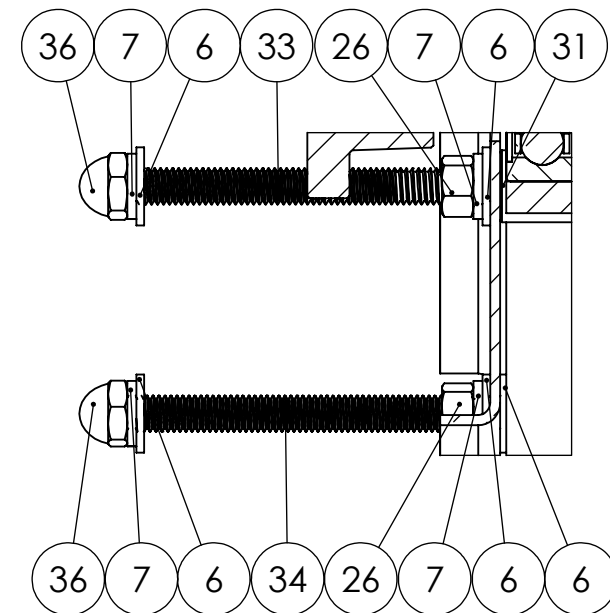



DETAIL D
ATTACHING BELT GUARD
DETAILS

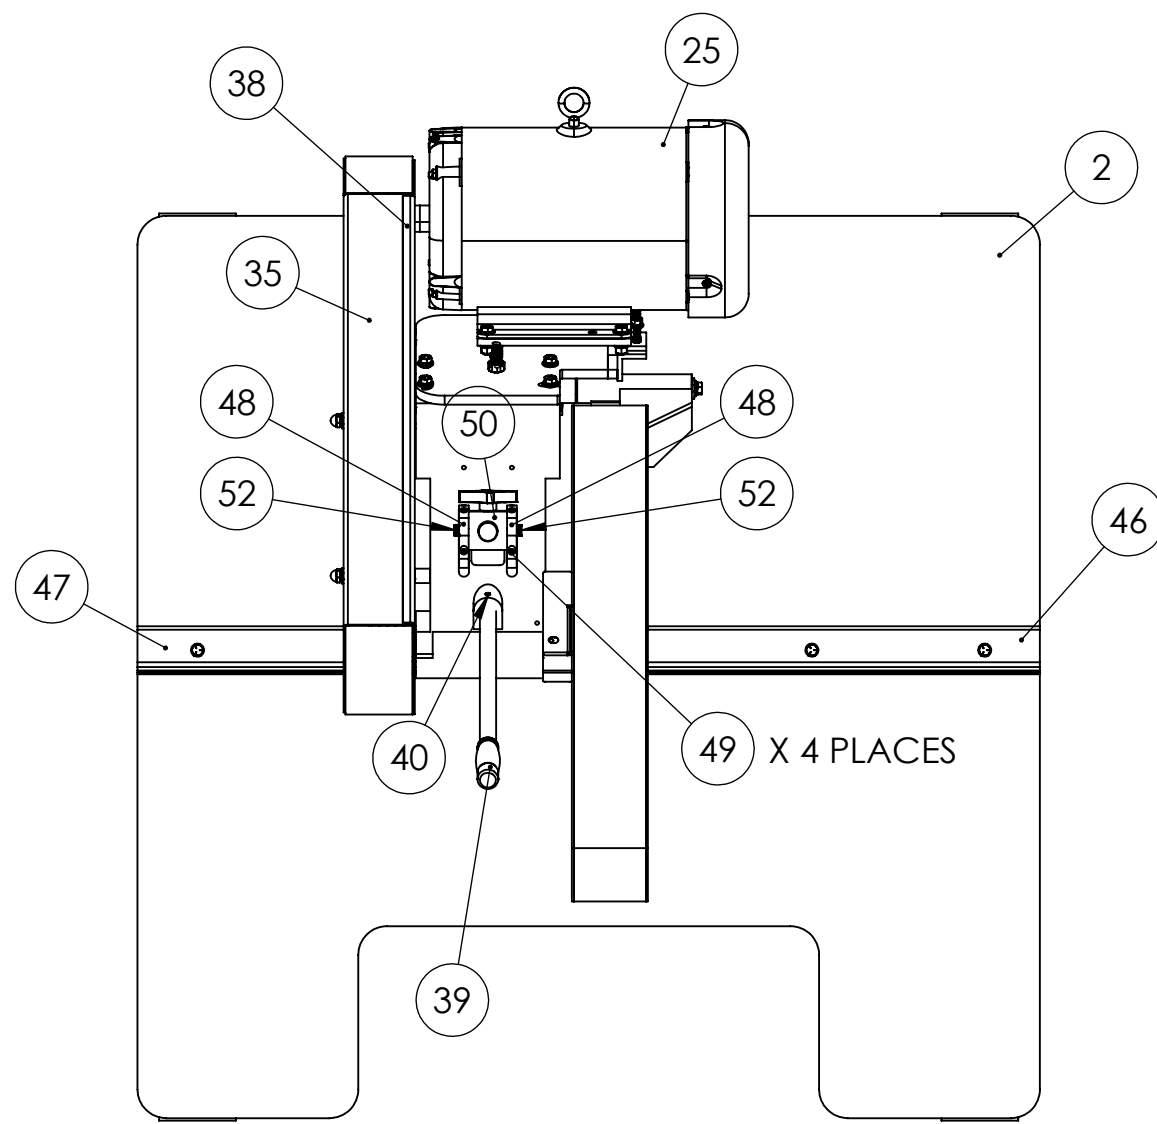



SECTION B-B
TOP VIEW LAYOUT

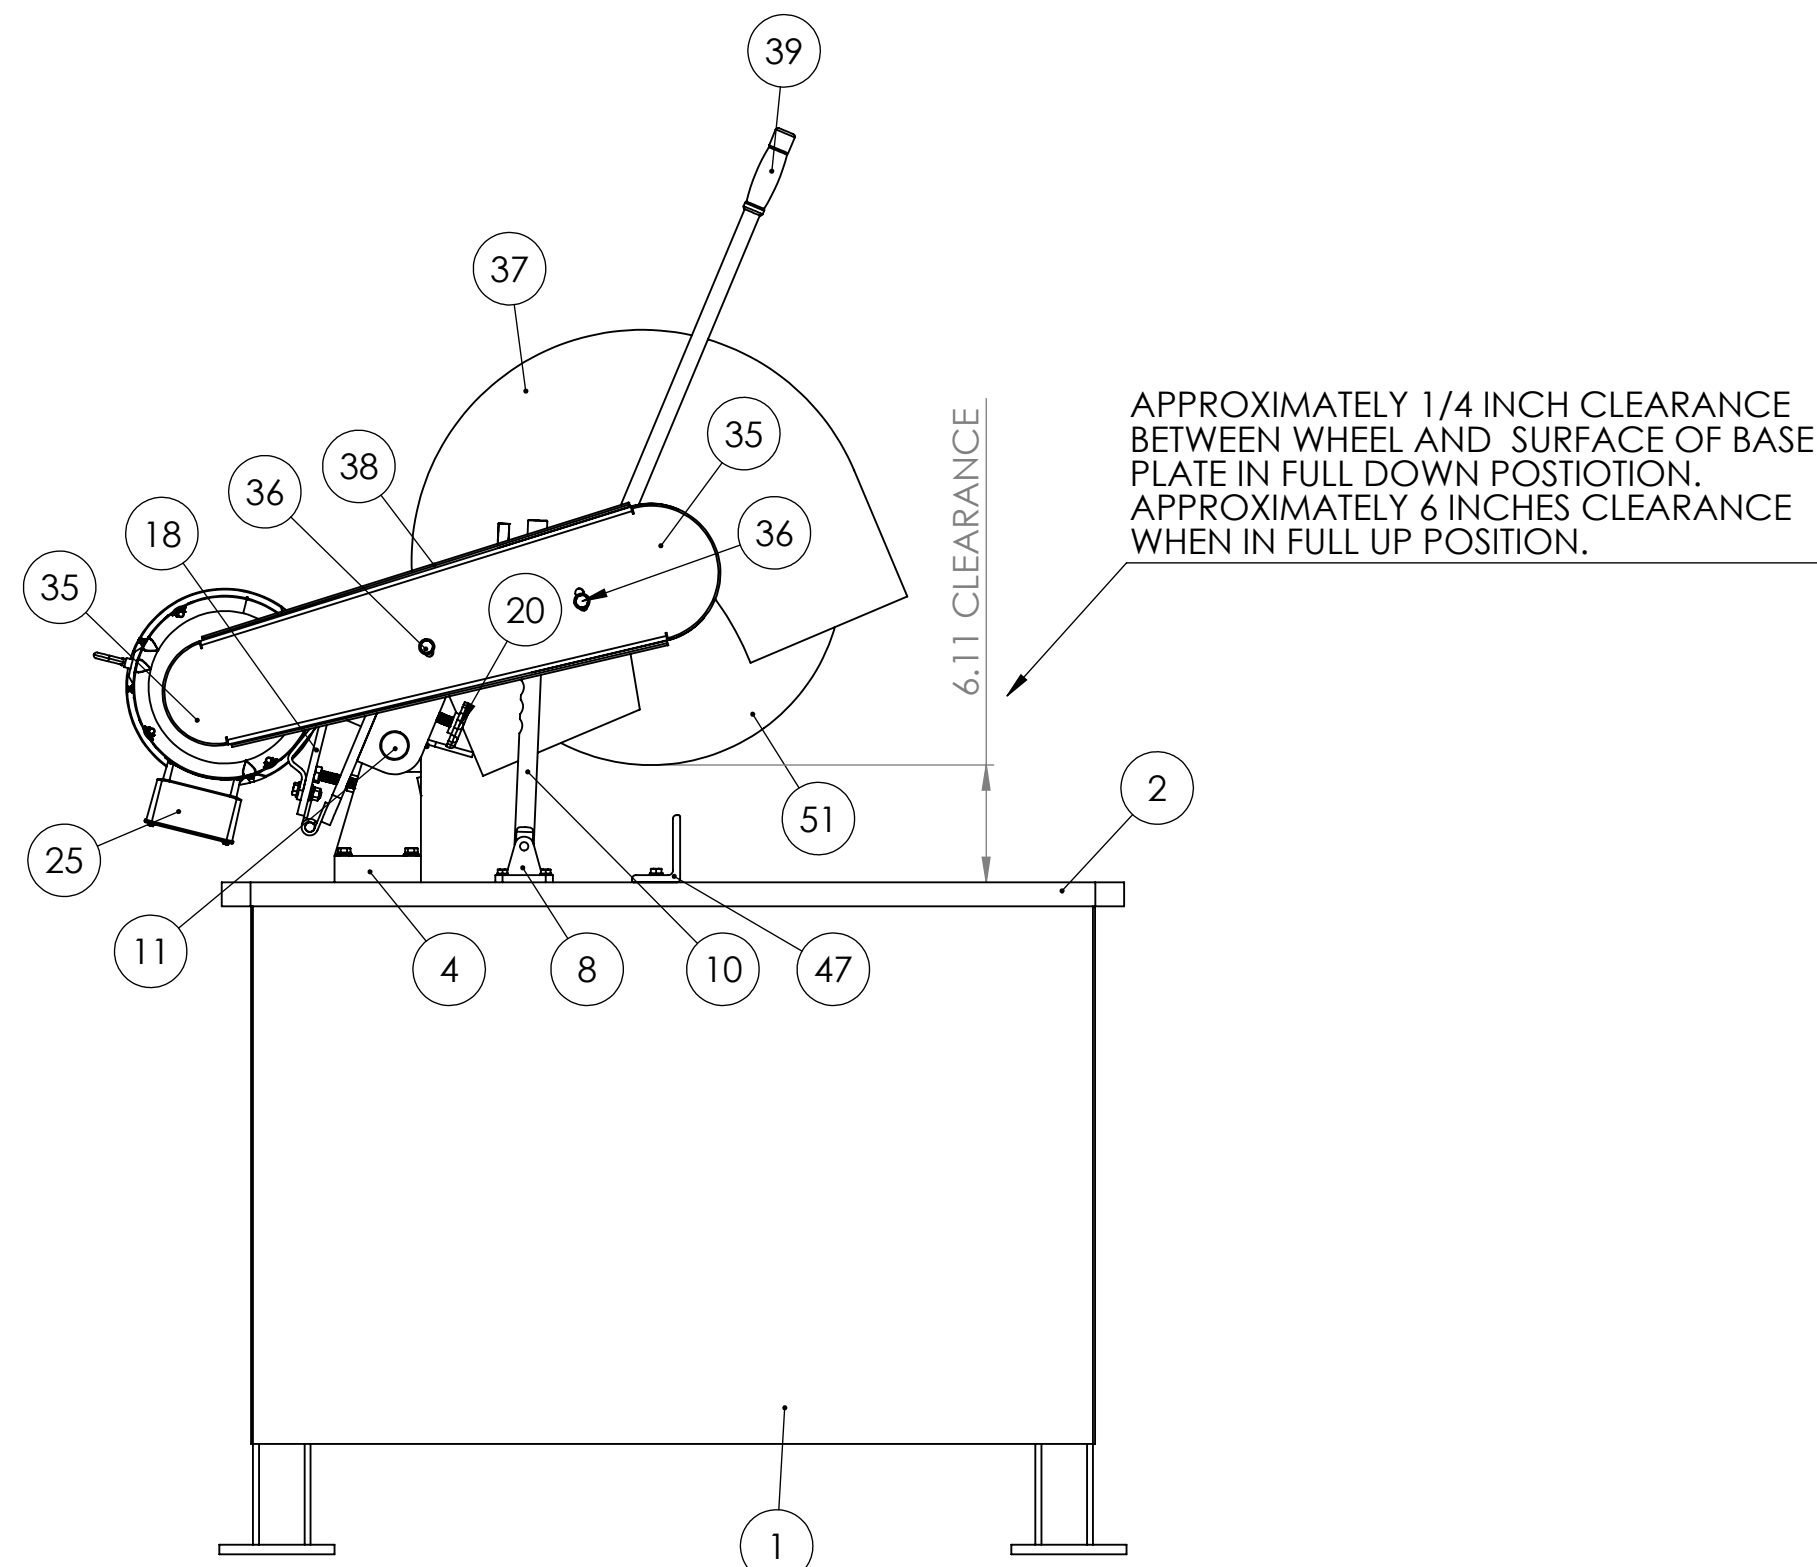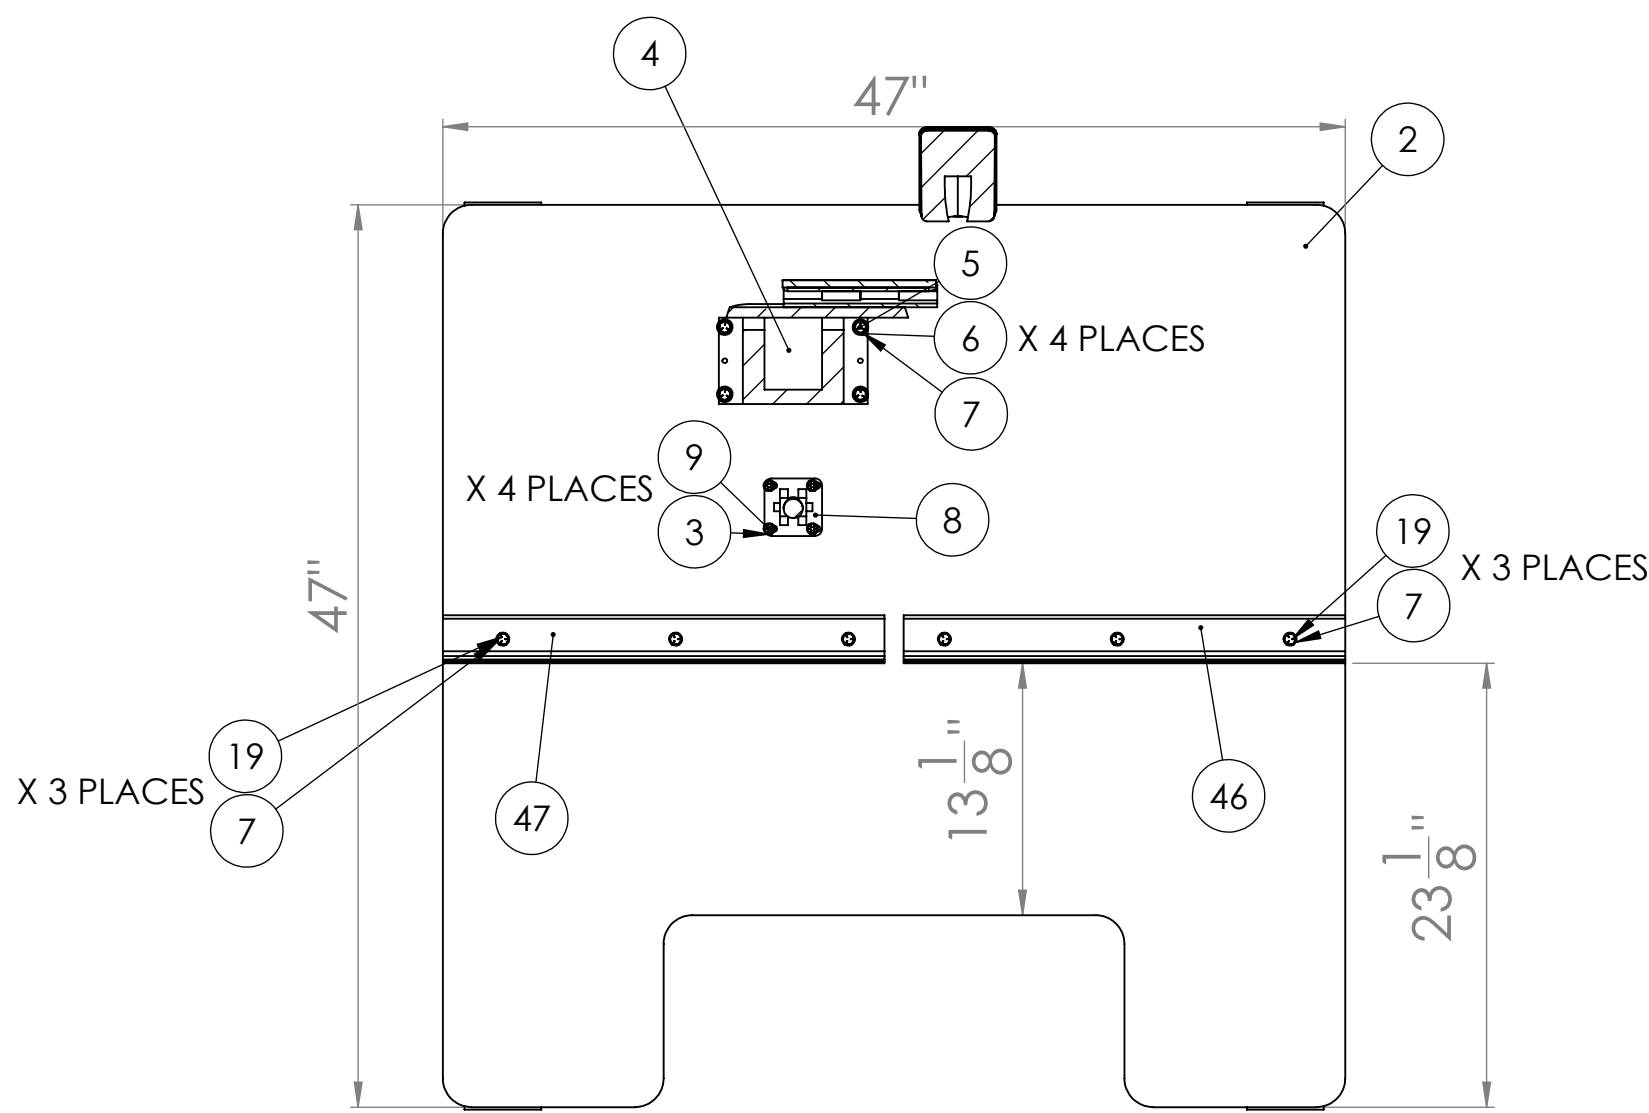

APPROXIMATELY 1/4 INCH CLEARANCE
BETWEEN WHEEL AND SURFACE OF BASE
PLATE IN FULL DOWN POSITION.
APPROXIMATELY 6 INCHES CLEARANCE
WHEN IN FULL UP POSITION.

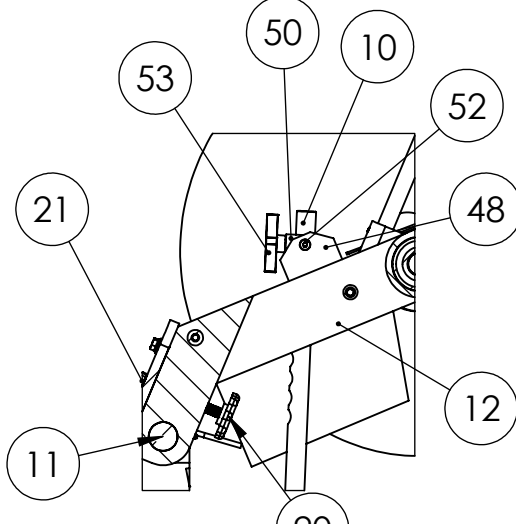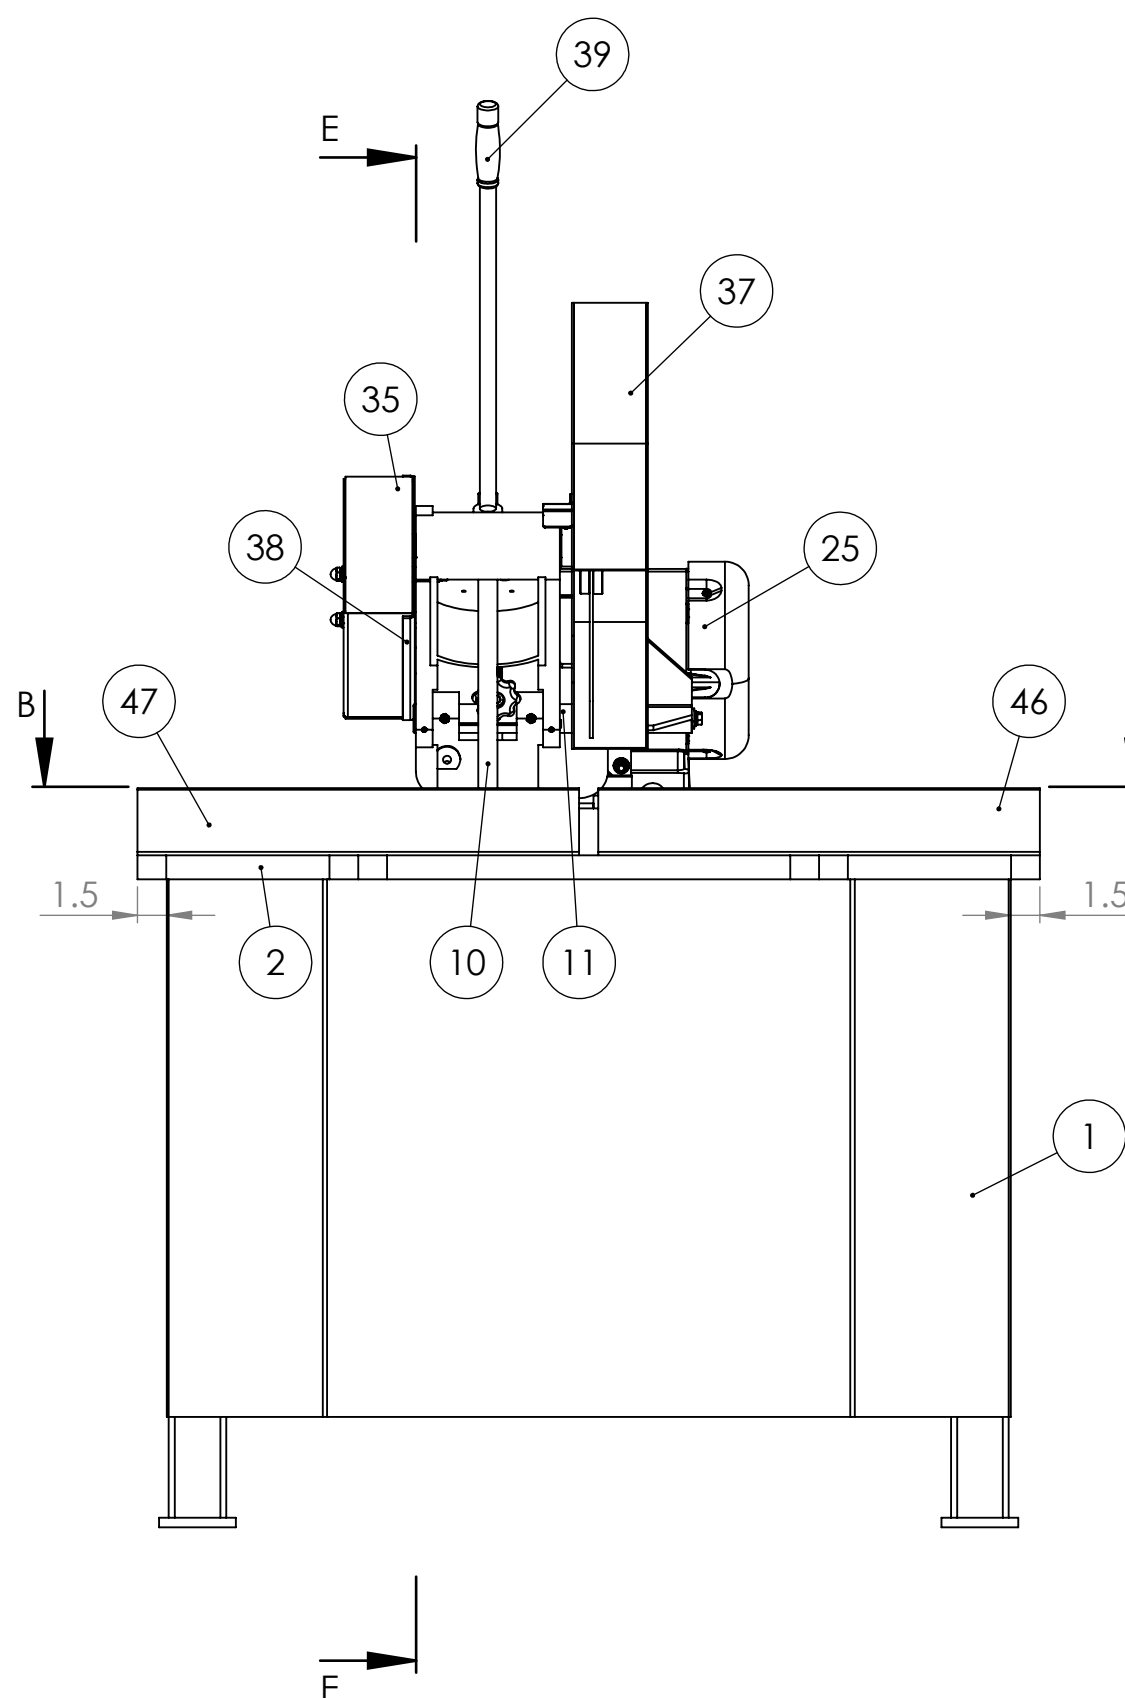

SECTION E-E
SCALE 1 : 10
INTERNAL SIDE VIEW
OF MOTOR TENSION SCREW
AND DOWN STOP PIVOTING
DETAILS

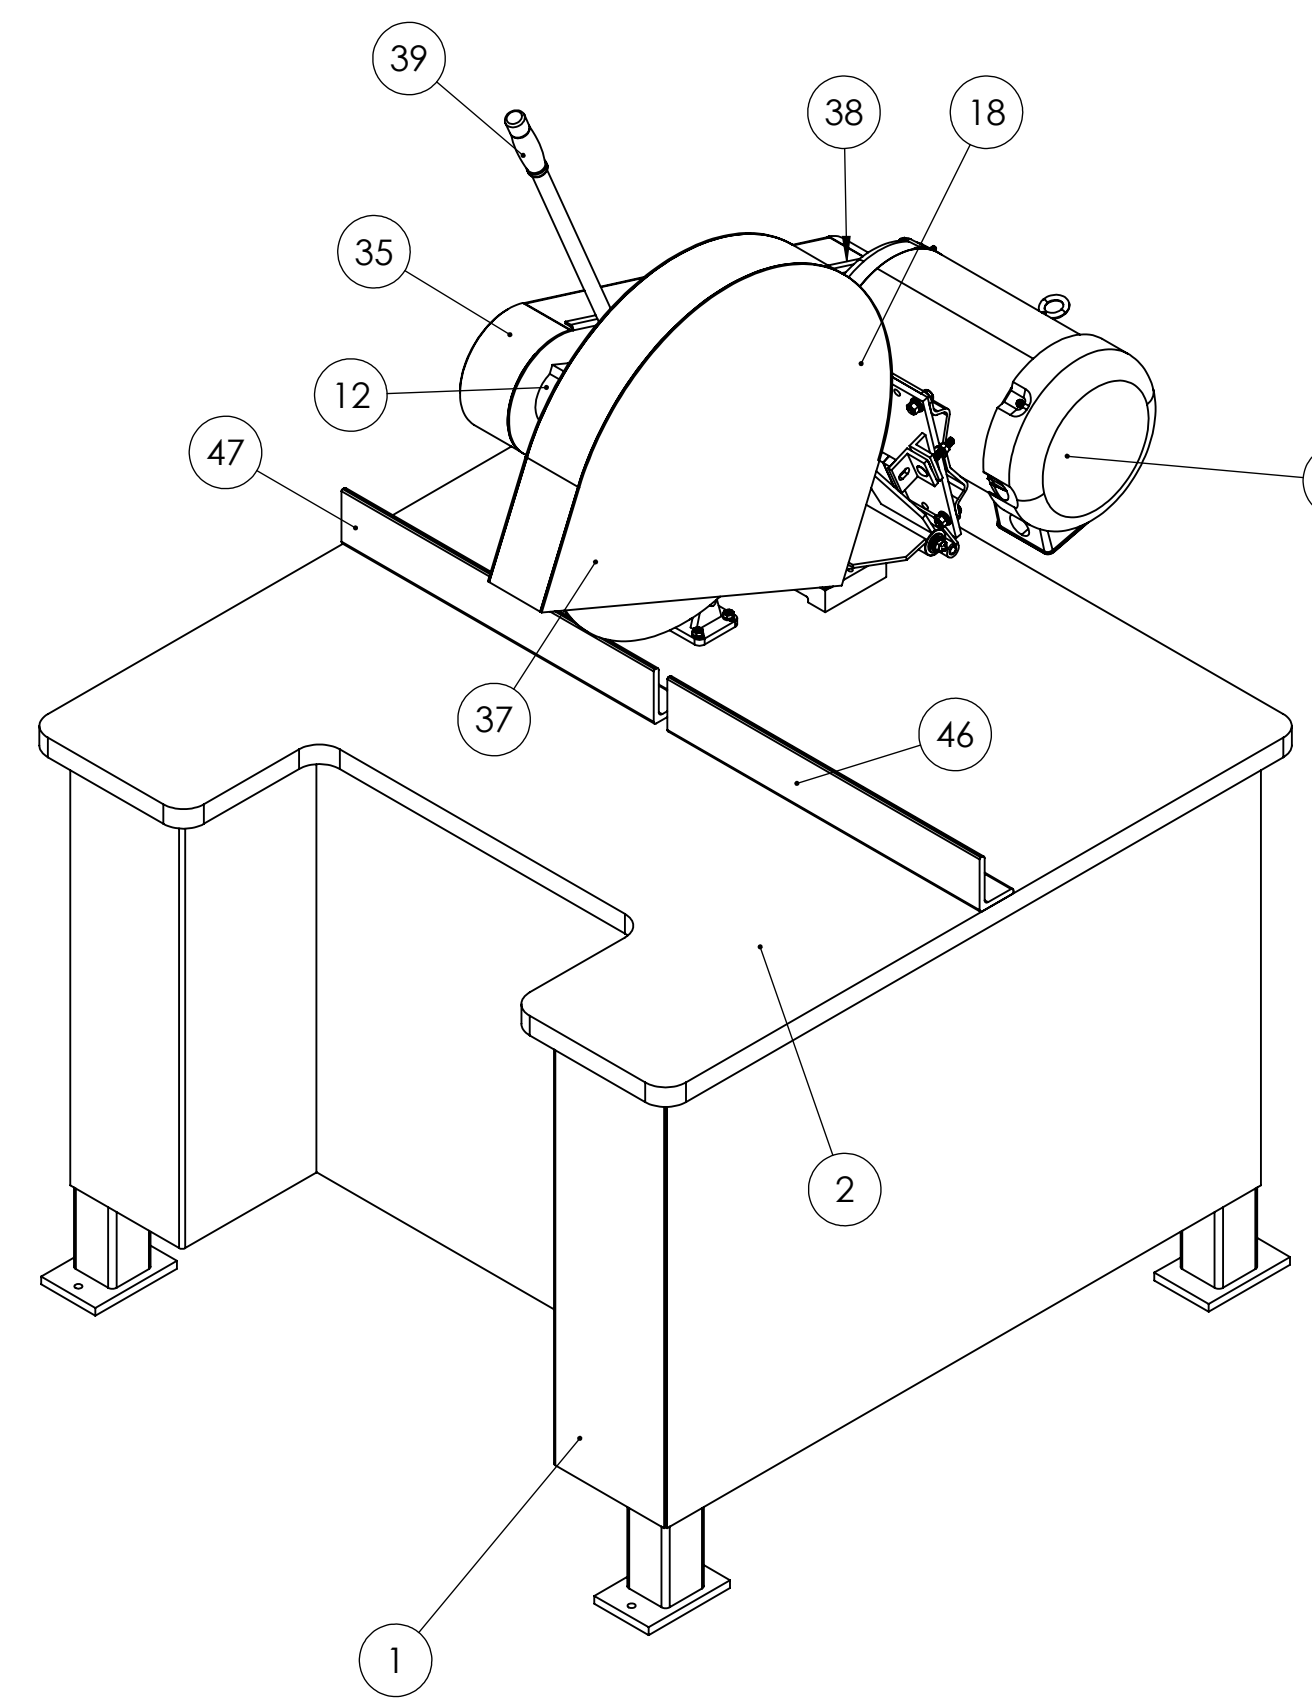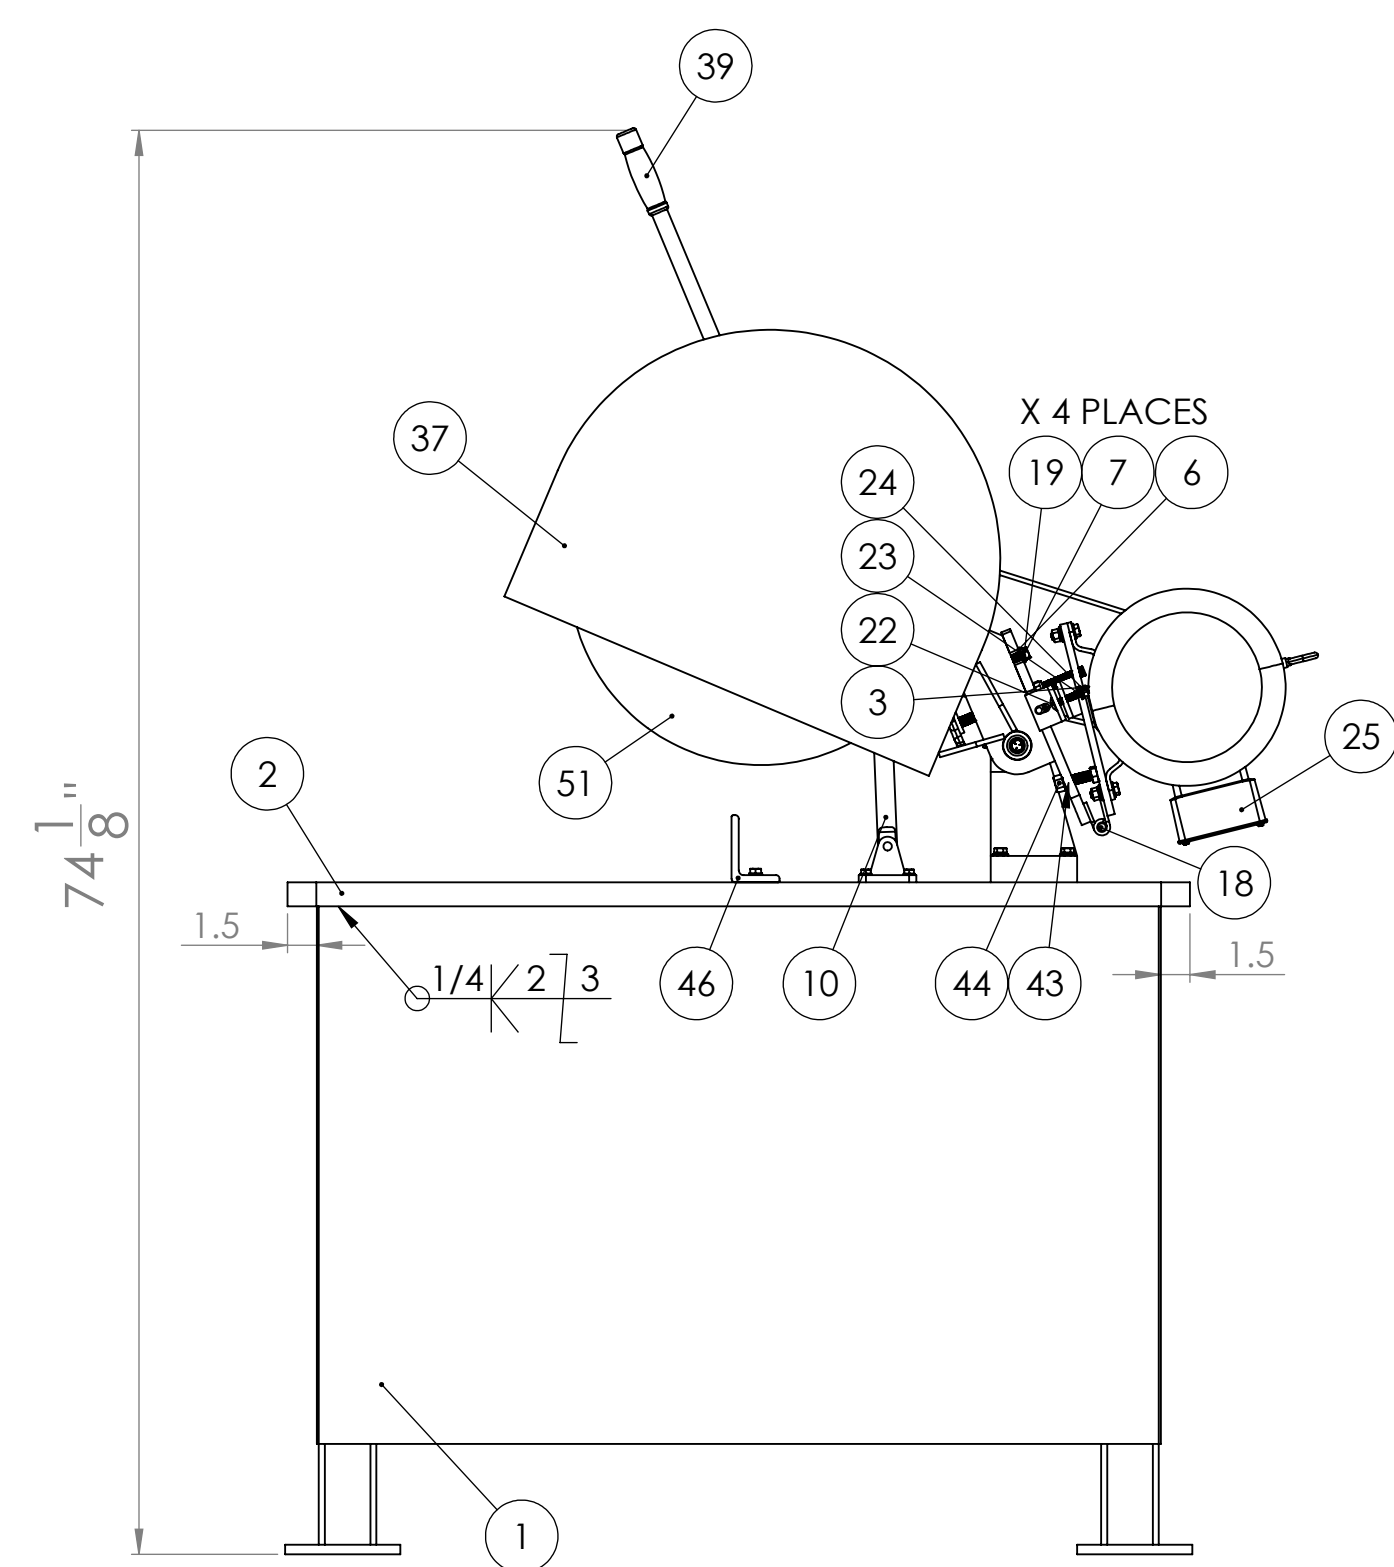

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	716-033	STAND ASSEMBLY FOR K20FS	1
2	829-041	TOP PLATE FOR K20FS	1
3	SLWZ031	5/16 SPLIT L/W Z	5
4	831-021	TRUNNION FOR KM16-18, K16-18, K20SSF (NEW STYLE)	1
5	HHC5037036	3/8-16 X 2-1/4 HHCS GR 5 Z	4
6	UFWZ037	3/8 USS F/W Z	23
7	SLWZ037	3/8 SPLIT L/W Z	24
8	1-34-4	SWIVEL BRACKET FOR 2 AND 2-1/2 CYLINDERS	1
9	HHC5031020	5/16-18 X 1-1/4 HHCS GR 5 Z	4
10	709-013	STOP. ARM FOR K20FS SAW	1
11	562-050	PIN, TRUNNION FOR K20RS	1
12	002-005	SAW ARM FOR K16-18, KM16-18, AND K20SSF SAW	1
13	044-004	K20 SPINDLE BEARING	2
14	701-010	SPINDLE W TIGHT FLANGE FOR K16-18, K20SSF, K20S SAWS	1
15	292-011	LOOSE FLANGE FOR K16-20, KM16-18, KM20-22	1
16	537-027	SPINDLE NUT FOR K16-20	1
17	SSKA031006	5/16-18 X 3/8 SOC SET KNURL PT.	2
18	486-010	MOTOR MOUNT PLATE K16-20 ASSEMBLY	1
19	HHC5037020	3/8-16 X 1-1/4 HHCS GR5 Z	15
20	696-029	MOTOR PLATE TENSION SCREW FOR K16-K20 SAWS	1
21	FJNZ050	1/2-13 F H JAM NUT Z	1
22	CRBZ031040	5/16-18 X 2-1/2 CARRIAGE BOLT Z	1
23	UFWZ031	5/16 USS F/W Z	1
24	FHN5031	5/16-18 FHN GR5 ZINC	1
25	486-009	20HP MOTOR FOR K20SSF-20, K20SW-20, KM20-22/20	1
26	FHN5037	3/8-16 FHN GR5 Z	7
27	560-046	MOTOR PULLEY SHEAVE FOR K16-18, KM16-18, K20SSF-15, KM20-22/15, KM20-22W/15 (K20SSF 7 1/2 HP), SPINDLE PULLEY SHEAVE FOR K20SW-15HP & 20HP	1
28	049-017	MOTOR PULLEY BUSHING FOR K20SSF-20,HP K20SW-20HP, K20E, KM20-22W-20HP	1
29	560-047	SPINDLE PULLEY SHEAVE FOR K16-18, KM16-18, K20SSF-15, K20RS, KM20-22/15, MOTOR PULLEY SHEAVE FOR K20SW-20HP	1
30	049-018	SPINDLE PULLEY BUSHING FOR K20SSF-20HP, K20SW-15 & 20HP, K20E, KM20-22 20HP, KM20-22W-15HP	1
31	123-003	COLLAR FOR S4- SPACER FOR K20 BELT GUARD	1
32	051-005	3V600 V-BELT FOR K16-18, K20SSF, K20E, K20RS, K20SW 6-1/4 INCHES OF 3/8-16 THREADED ROD	4
33	RND-0.375-16X6.25	6-1/4 INCHES OF 3/8-16 THREADED ROD	1
34	RND0.375-16X5.375	5-3/8 INCHES OF 3/8-16 THREADED ROD	1
35	342-122	OUTER BELT GUARD (NEW STYLE) FOR K20E, K20SW, AND K20 SERIES 20HP SAWS	1
36	CPNZ037	3/8-16 CAP NUT NICKEL	2
37	342-112	HALF ROUND GUARD FOR K20SSF	1
38	342-121	INNER BELT GUARD (NEW STYLE) FOR K20E, K20SW, AND K20 SERIES 20HP SAWS	1
39	381-009	HANDLE WITH GRIP FOR K16-20 ABRASIVE SAW	1
40	SSKA025006	1/4-20 X 3/8 SOC SET KNURL PT.	1
41	ZERK012000	1/8-27 X 1 1/16 STRT LUBE FITTING	2
42	049-120	SPACER BUSHING FOR K20 SERIES/20HP SPINDLE	1
43	RND-0.5-13 THRD	1-3/4 INCHES OF 1/2-13 THREADED ROD	1
44	FHN5050	1/2-13 FHN GR5 Z	1
45	UFWZ050	1/2 USS F/W Z	1
46	293-010R	RIGHT SIDE FENCE FOR K20FS SAW	1
47	293-010L	LEFT SIDE FENCE FOR K20FS SAW	1
48	041-037	HSM14 UPPER CYLINDER BRACKET	2
49	SHCA025024	1/4-20 X 1-1/2 SHCS	4
50	053-035	PIVOTING BLOCK FOR K20FS DOWN STOP ROD	1
51	20INCHWHEEL		1
52	SSBA037008	3/8 X 1/2 SOC SHOULDER BOLT	2
53	441-011K20FS	MODIFIED 2FS, 2FS72, 2FSM, 25K7 TRACKING KNOB FOR K20FS	1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KALAMAZOO FOUNDRY, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KALAMAZOO FOUNDRY, INC. IS PROHIBITED.


UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS < 1/8" ANGULAR < 30° DECIMAL < .005 THREE PLACE DECIMAL < .0005	DRAWN CHECKED ENG APPR. MFG APPR.	
INTERPRET GEOMETRIC TOLERANCES FIRST (IF APPLICABLE)	G.A. COMMENTS:	
NEXT ASSY	USED ON	FINISH
APPLICATION	DO NOT SCALE DRAWING	

KALAMAZOO
FOUNDRY, INC.

TITLE:
K20 20HP
FOUNDRY SAW

SIZE: DWG. NO. E K20FS-20HP
SCALE: 1:5 WEIGHT: SHEET 1 OF 2

TYPICAL K20FS ARC MEASUREMENTS AND WHEEL CLEARANCE

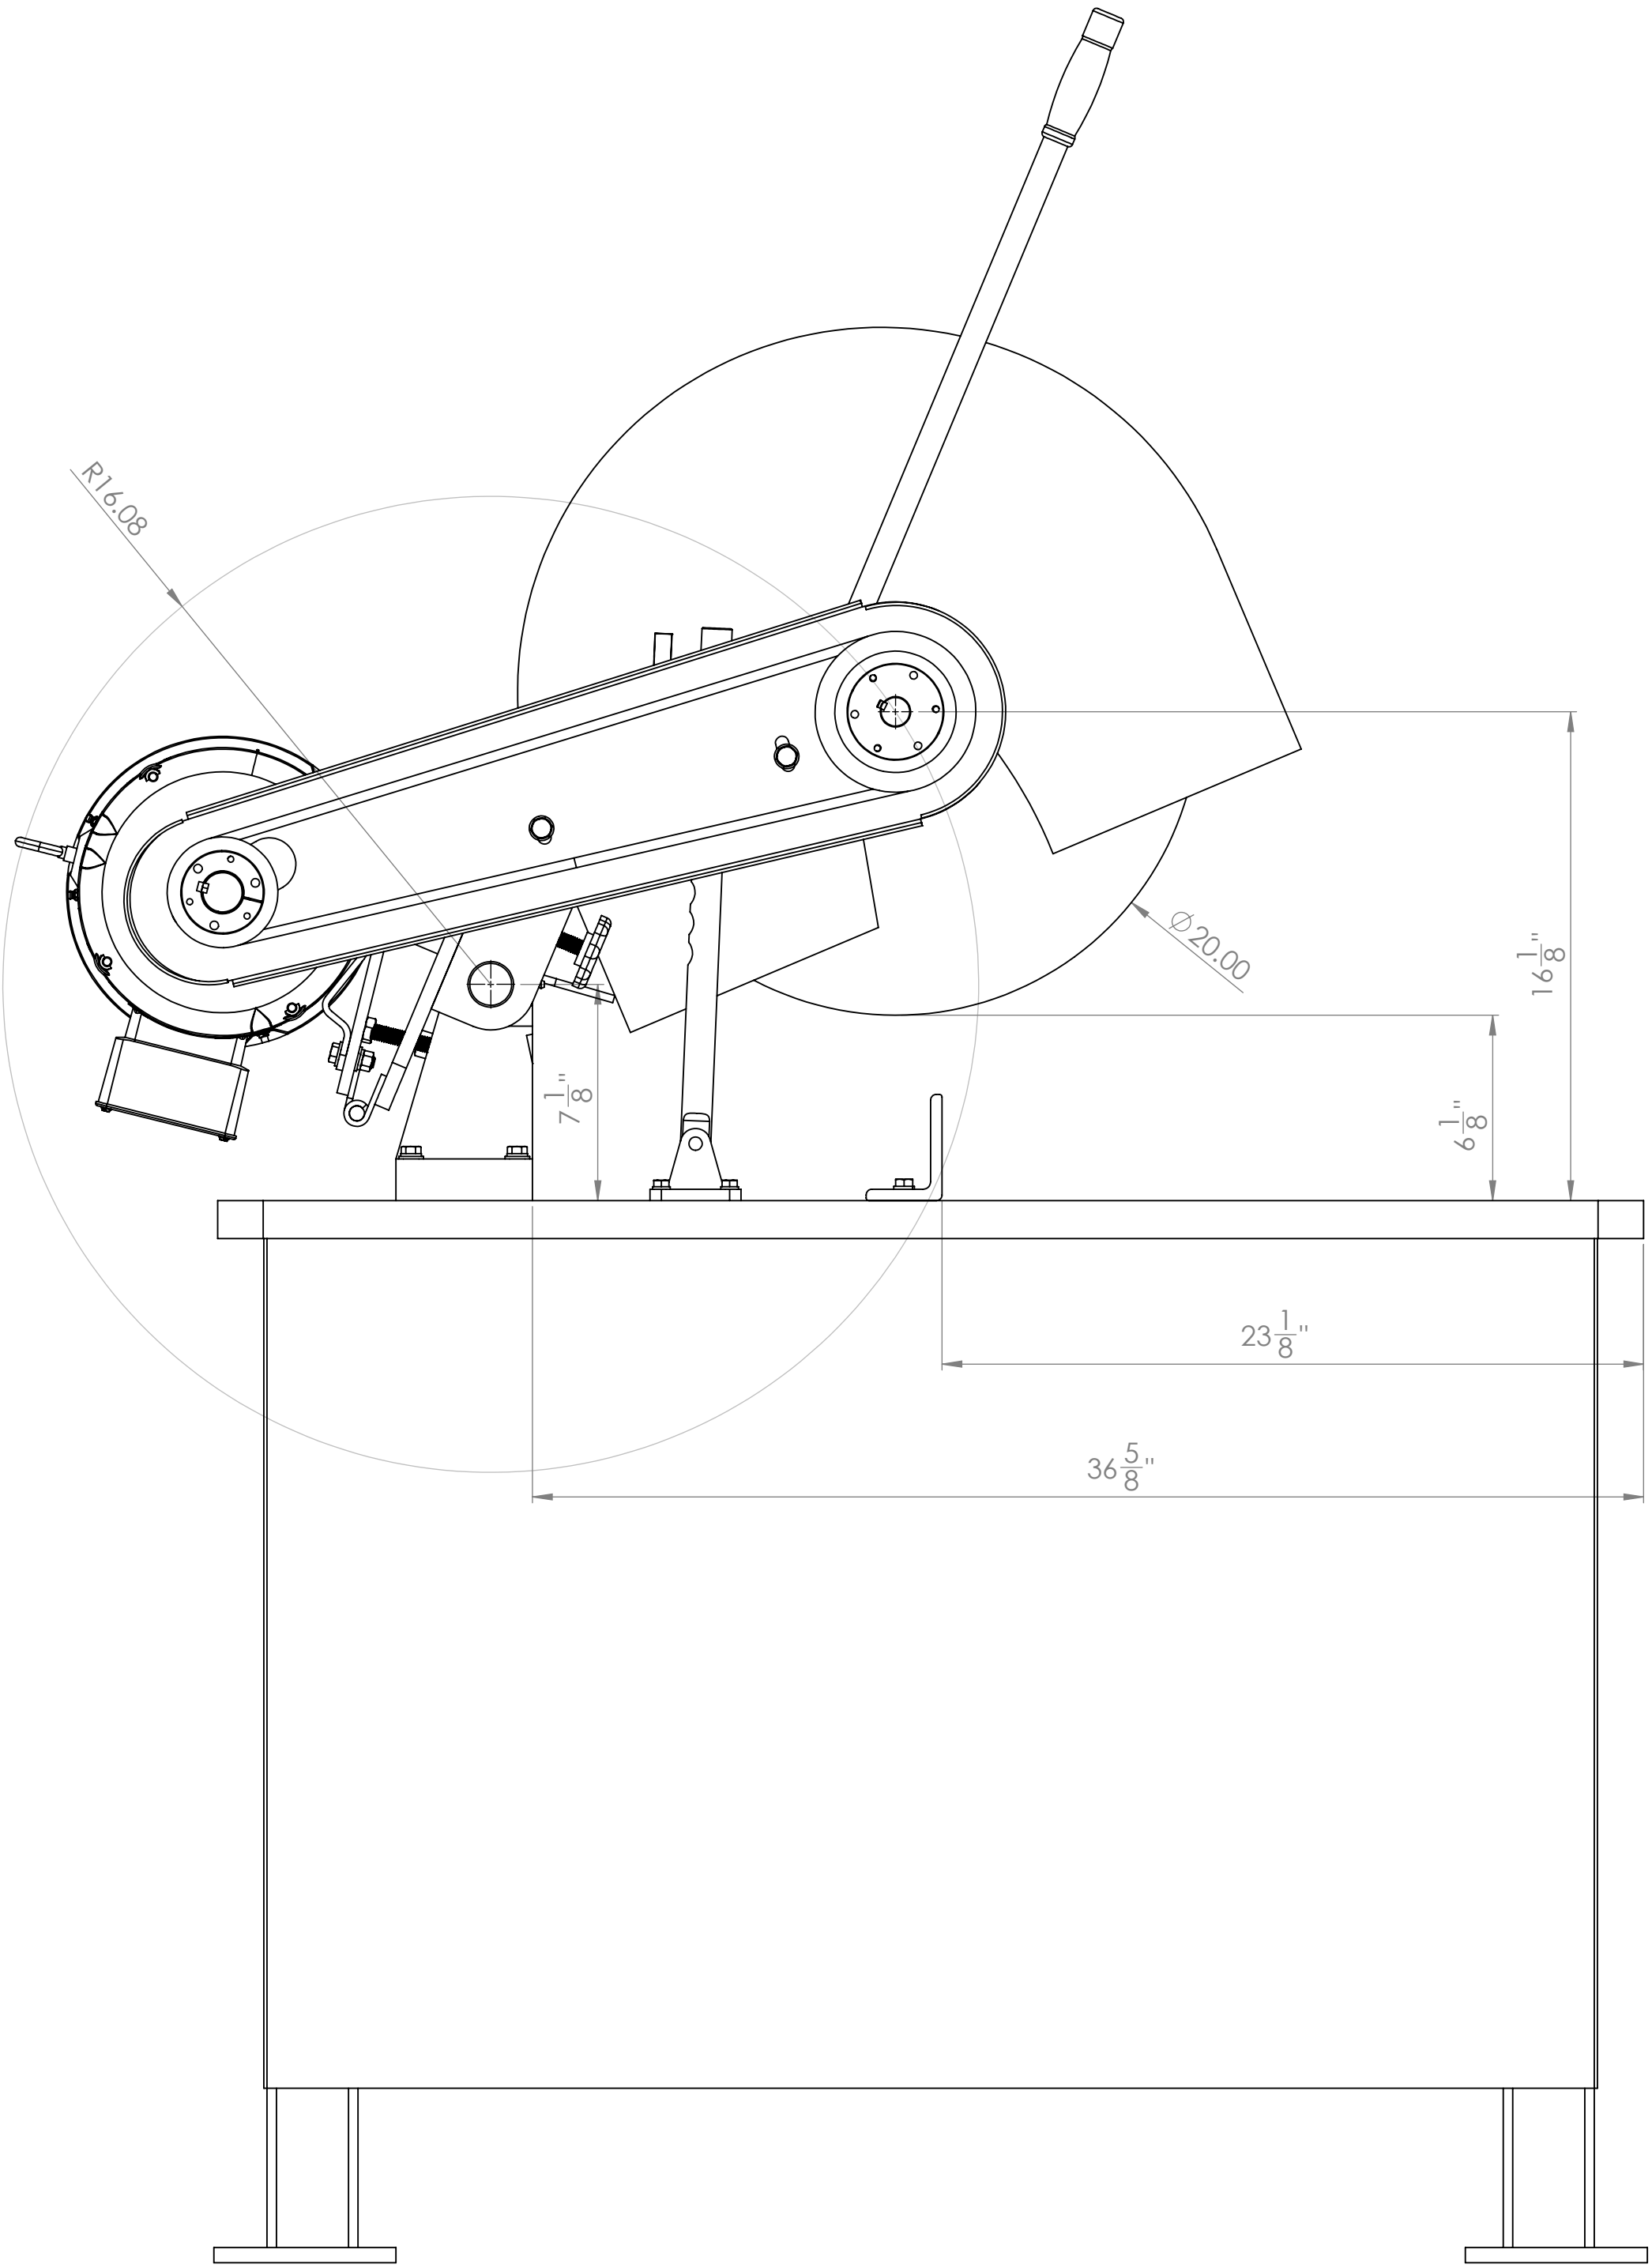

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
«INSERT COMPANY NAME HERE». ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
«INSERT COMPANY NAME HERE» IS
PROHIBITED.

			UNLESS OTHERWISE SPECIFIED:		NAME	DATE	
			DIMENSIONS ARE IN INCHES		DRAWN		
			TOLERANCES:		CHECKED		
			FRACTIONAL: ±		ENG APPR.		
			ANGULAR: MAACH ± BEND ±		MFG APPR.		
			TWO PLACE DECIMAL		Q.A.		
			THREE PLACE DECIMAL ±		COMMENTS:		
			INTERPRET GEOMETRIC				
			TOLERANCING PER:				
			MATERIAL				
			FINISH				
NEXT ASSY		USED ON					
	APPLICATION		DO NOT SCALE DRAWING				

TITLE:	K20 20HP FOUNDRY SAW	
SIZE	DWG. NO.	REV
D	K20FS-20HP	
SCALE: 1:10 WEIGHT:		SHEET 2 OF 2